

**Technical Data Sheet**  
**Filtrate outlet FA-1500**  
**Article-No. 80100048**



Complete preassembled filtrate extraction unit consisting of:

- self priming permeate pump
- pressure gauge
- frequency inverter
- vacuum pressure sensor

The FA-1500 is suitable for filter housing:

MB5-5, and in parallel connected filter housings of the MB- filter housing series

Description	Unit	Value
Size of the Pump	L x W x H mm	540 x 240 x 360
Diameter outlet	ISO 228	G2 <sup>1</sup> / <sub>2</sub>
Diameter inlet	ISO 228	G2 <sup>1</sup> / <sub>2</sub>
Delivery flow	m <sup>3</sup> /d	500 bis 1500
Max. pump capacity at 8 m level difference	L/h	62.500
Filtration pressure	bar	0.1-0.25
Weight	kg	ca. 38,5
Nominal power	kW	2,2

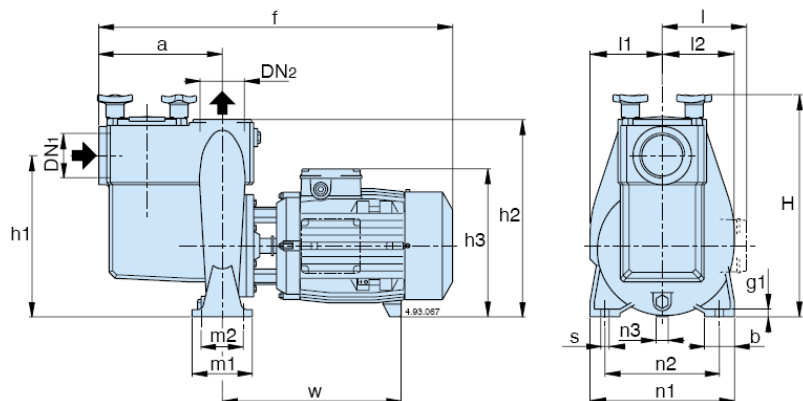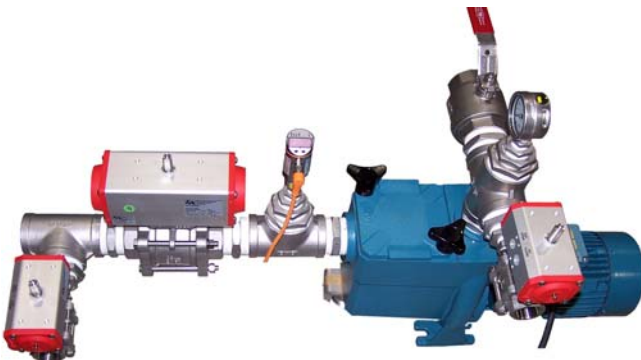

TYP	DN1	DN2	mm																	
			a	f	h1	h2	h3	H	m1	m2	n1	n2	n3	b	s	l	l1	l2	w	g1
B-NMP 50/12FE-GE-HE B-NMP 50/12DE	G 2 <sup>1</sup> / <sub>2</sub>	G 2 <sup>1</sup> / <sub>2</sub>	205	540 597	262	322	222 240	360	100	70	240	190	37 20	50	14	-	120	117	234 298	12